


# Starter - Marine Maintenance Free Batteries



## BB 12-70Ah 12V70Ah Marine Battery

- CQW Marine Battery
- Maintenance-free marine battery
- No need to refill electrolyte
- No need for equalisation charging
- CCS approved
- Valve-regulated sealed structure

### Dimension (mm)

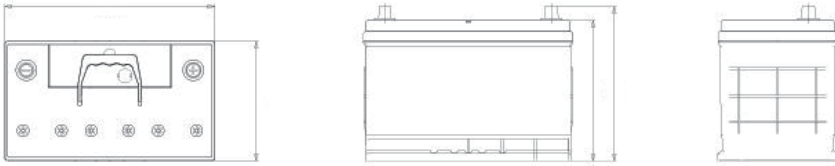

#### Dimension:

Length: 258±2mm Width: 173±2mm  
Height: 200±2mm Total height: 220±2mm

### Technical Specification

Rated voltage .....	12V
Rated Capacity(C20) .....	70Ah
Negative grid weight .....	46g
Negative plate weight .....	130g
Positive grid weight .....	60g
Weight positive plate .....	145g
Plate per cell (negative) .....	Tablet/p
Plate per cell (Positive) .....	Tablet/p
Plate per cell .....	Tablet/p
Internalised selection programme .....	293/No
Gravity of sulphuric acid .....	1.28±0.015/cm <sup>3</sup> (25°C)
Terminal type .....	T2
Layout .....	(1)(0)
Fix mode .....	Top Fixation
Shell .....	Polypropylene P.P
Cover .....	Polypropylene P.P
Handle .....	Polypropylene P.P
Handle structure .....	Intermediate Single Handle
Charge method .....	Constant Voltage and Current Limiting Float
Charge Voltage .....	Maximum Charge Voltage: 14.85V
Charge current .....	Maximum Charge current: 16A
Charge period .....	Charge 24 hours continuously
Net/Gross weight .....	16.51/17.53kg
Package size .....	260×180×250mm

Battery Characteristics		
Rated Capacity	20-hour rate(C20)	70Ah
Reserve Capacity(RC)		140min
Starting Current CCA(-18°C)		500A

